

# Swefog Xeon Intellahazer

---



Powerful. Reliable. Quiet. Fully loaded.  
Xeon Intellahazer. Like a rock.

---

# SWEFOG

SMOKE-FOG-HAZE :: MADE IN SWEDEN

## OUTPUT & CONTROLS:

- Swefog X-power heavy-duty 1,800W smoke generating plant: Cast aluminium heat exchanger with wide bore stainless steel vaporizer coil for quiet vaporizing. Integrated drop trap.
- High output capacity: Several types of fluid can be used, for creating everything between a crystal-clear, silk haze, to a high density fog, suitable for filling large stages or outdoor arenas.
- Very precise atmospheric control: Output adjustable in 99 steps (1-100%).
- Fan equipped with oversized low-rpm air turbine for quiet operation & high output capacity. Fan speed adjustable 11-100%. Auto or manual speed settings. Fan is able to operate extremely silent.
- Industrial quality silent air pump for smooth haze output without puffs of fog or fluid drops.
- Heat-up time 7 minutes only. Continuous operation at all output levels.

## FULLY LOADED:

- DMX 512, 0-10V, real-time timer, remote & stand-alone operation as standard features.
- No guesswork: Splash-proof control panel with an easy-to-use menu system and illuminated alphanumeric clear text display.
- ASOC - Advanced Sequence Operation Control: 8 individual operation profiles can be programmed, with independent settings of output, fan speed, operation & delay time. Suitable for stand-alone operation cycles. Single or repeated run.
- Auto-On: Machine will switch on automatically when connected to a mains outlet.
- Plug & play: Last operation configuration is set as default next time the machine is switched on. Perfect for touring use.
- Swefog Merlin2 R.I.S.C. processor-based state-of-the-art electronics.
- Swefog MiniTainer™ 2.5L fluid tank (included) with industrial type quick release tube fitting for easy fluid change. Completely sealed canister with air inlet filter & checkvalve prevents fluid from dust.
- Removable fluid tank compartment for easy conversion to larger fluid canisters or flight casing.

## SAFETY:

- Optical low fluid sensor, no wires. Auto-reset.
- Overheat protection of heat exchanger & pumps, automatic reset.
- Heavy-duty carry handle. Can also be used as a flying bracket (requires optional flying bracket kit).

## ACCESSORIES:

Manual hand-held remote control  
Flying bracket kit  
Flight cases



## Item no:

40 220-240 Swefog Xeon Intellahazer 240V 50Hz  
40 220-120 Swefog Xeon Intellahazer 120V 60Hz

## TECHNICAL DATA

### General:

Type:	Vaporizing haze generator
Output volume:	0 - 2,500 m <sup>3</sup> / minute (max)
Continuous operation at full output:	Yes
Smoke projection:	45 degrees angle, approx. 20m
Fluid consumption:	0 - 17.5ml / min (1,050 ml/h max)
Fluid capacity:	2.5L (Swefog MiniTainer™ )
Fluid type:	All Swefog Neutral-Pro water based fluids
Heat-up time:	7 minutes
Fan type:	133mm / 1,650rpm 0,1 kW high output air turbine
DMX channels required:	2 (1st output, 2nd fan)
Low fluid shutoff:	At completely empty canister


### Electrical:

Mains voltage supply:	240V 50Hz (EU) 120V 60Hz (US)
Power consumption:	1,800W / 8A@240V, 15A@120V

### Mechanical:

Weight (net):	11 kgs
Weight (boxed):	15 kgs
Box dims LxWxH:	650 x 470 x 420 mm

The design of Swefog Xeon Intellahazer is a registered community design and copy protected by EU & international laws. The Swefog & Swefog Xeon Intellahazer brand names & logotypes are registered trademarks.

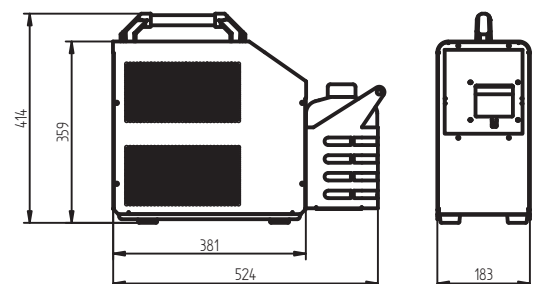

Distributed by:

**SWEFOG**  
Technology Group AB

Industrivägen 15, Box 106, 682 23 FILIPSTAD, Sweden.  
Tel +46-590-122 50 Fax +46-590-122 09. [www.swefog.com](http://www.swefog.com)